

FIRE & RESCUE TRUCK



RESCUE TOOLS



FIRE PUMP



DISASTER MANAGEMENT



SAFETY EQUIPMENT




TRUCK RESCUE & LADDER

FIRE PUMP

RESCUE TOOLS

DISASTER MANAGEMENT

SAFETY EQUIPMENT

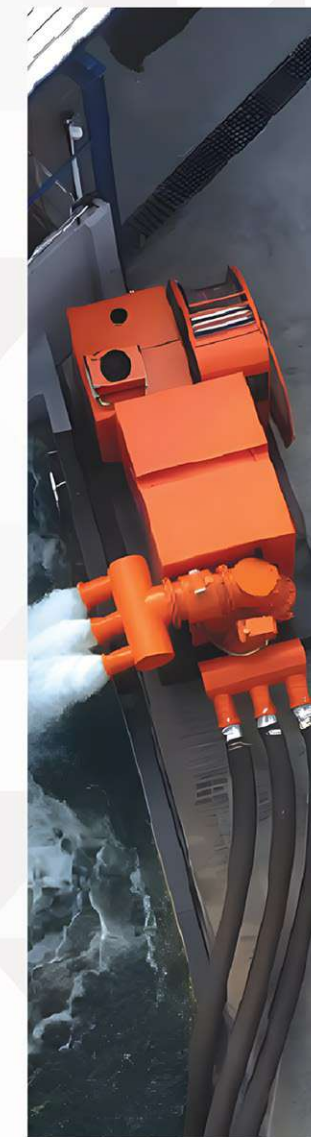

indosan.com

021 5668 436

FIRE TRUCK



FT 10000 ltr
Portable / PTO pump
Single / Double Cabin



FT 4000 ltr
Portable / PTO pump
Single cabin



FT 3500 ltr
Portable / PTO pump
Double Cabin



WS 4000 ltr
Portable pump



Airport Support
Airport Support Fire Truck



CAFS Truck
Compressed Air Foam System

FIRE RESCUE



Forestry Fire Rescue
Off-road firefighting



Aerial Ladder
21-52 meter



Truck Rescue
Fire Truck with ladder

FIREFIGHTING JEEP



Double Cabin 400 ltr
Portable mid range pump



Single Cabin 600 ltr
Portable mid range pump



Jeep Rescue
Light rescue Equipment

LIGHT FIREFIGHTING



3 Wheel Fire Rescue
Portable Tank 500 ltr



Trail Karhutla
Fire Rescue Motorbike 2 HP Pump

FIRE PUMP



23HPVGD-1D
High Volume
380000 Vanguard (Electric & Recoil)
Flow 2080 LPM | Pressure 8 bar
1700 LPM @2 bar | 600 LPM @7 bar
In 4" | Out 2,5"



18HPVGD-1D
High Volume
3564 Vanguard (Electric & Recoil)
Flow 1480 LPM | Pressure 9 bar
1480 LPM @2 bar | 170 LPM @9 bar
In 4" | Out 2,5"



14HPKHL-EM-MR
Mid Range
CH440 Kohler (Electric & Recoil)
Flow 910 LPM | Pressure 10 bar
780 LPM @2 bar | 440 LPM @7 bar
In 2,5" | Out 1,5"



6HPHND-EM-TW
High Pressure
GX200 Honda (Electric & Recoil)
Flow 284 LPM | Pressure 9,7 bar
270 LPM @0,7 bar | 130 LPM @9 bar
In 1,5" | Out 1 x 1,5", 2 x 1"



CFPV 1500
PTO Pump
Flow 1500 LPM
Pressure 8 - 10 bar
In 4" | Out 3"



CN-10-300
PTO Pump
Flow 3000 LPM
Pressure 10 - 54 bar
Normal/ Multi Pressure
In 4" | Out 3"



6HP-FL
Floating Pump
FJ180V Kawasaki
Flow 760 LPM | Pressure 3 bar
760 LPM @0,3 bar | 190 LPM @2 bar
Out 2,5"



13HP-FL
Floating Pump
GXV390 Honda (Recoil)
Flow 1700 LPM | Pressure 5,2 bar
1700 LPM @1,4 bar | 440 LPM @4,5 bar
Out 2,5"



2HPHND-M
Backpack Pump
GXH50 Honda (Recoil)
Flow 320 LPM | Pres. 5,5 bar
285 LPM @0,7 bar | 95 LPM @3,5 bar
In 1,5" | Out 1,5"



8 HP
Backpack Pump
Electric & Recoil
Max flow 330 LPM | Pressure 16 bar
Rated 198 LPM @7 bar
In 2" | Out 1,5"



10 HP
Backpack Pump
Electric & Recoil
Max flow 270 LPM | Pressure 18 bar
Rated 180 LPM @7 bar
In 2" | Out 1,5"



Foam Blower
Knapsack Pump
Engine power 6 HP
Max flow 180 LPM | Pressure 4-12 bar
Foam tank volume 8 ltr

ACCESSORY



Selectable Nozzle
1,5" | 115-475 LPM @ 7 Bar
2,5" | 360-950 LPM @ 7 Bar



Branchpipe Jet
Jet spray
Material brass
Connection 1,5" & 2,5"



Branchpipe Spray
Variable spray
Material brass
Connection 1,5" & 2,5"



Piercing
Connection 1,5" Mac
Rated flow 300 LPM @7 bar
Compatible Class A Foam
Cocok untuk lahan gambut



Forestry Nozzle
Connection coupling 1,5"
Performance 284 LPM @6,9 bar
Adjustable spray mode



SAN Fire
Selang Pemadam Polyester
1,5" - WP 22 bar/ BP. 74 bar
2,5" - WP 22 bar/ BP. 74 bar



SAN Fortte
Selang Pemadam Polyester
1,5" - WP 25 bar/ BP. 86 bar
2,5" - WP 25 bar/ BP. 86 bar



SAN Tritor
Selang Pemadam Rubber
1,5" - WP25 bar / BP. 86 bar
2,5" - WP 25 bar / BP. 84 bar



Monitor
Jet / Fog Spray
Flow rate 1200/ 1800/ 2400 LPM
Working Pressure 14 bar
In 2,5" | Out 2,5"



Y Connection
Aluminum Alloy Casting
Working Pressure 14 bar
Brass ball valve with lock handle
In 1,5"/ 2,5" | Out 2 x 1,5"/ 2 x 2,5"



Coupling
Material brass / aluminum alloy - 1,5" / 2,5"

FIREMAN EQUIPMENT



Rescue Helmet
Flame retardant thermoplastic
UV Protection
Heat & impact resistance
Fire proof up to 180 °C



SAN Fire Defender

Flame retardant
Double visor protection
Aluminized neck protector
Include night flashlight



Nomex Firesuit

Nomex IIIA 4 layers
93% nomex | 5% kevlar | 2% P140
3M reflective stripe
EN469 certified

Fireman Glove

EN659 certified
4 layers structure
Heat insulation



Fireman Boots

Fire resistant and waterproof
Slip resistance
BOA Fit System



Baju Tahan Panas

Flame retardant cotton
Continue burning time <10 s
Heat stability 160 °C



Rescue Glove

4 layers structure
Anti puncture
Flame retardant fabric

Sepatu Bot Karet

Flame & abrasion resistance
Electrical & radiant heat insulation
Anti slip >15
EN15090 certified



Fire Hood

Best heat insulation
Structure 2 layers
50% Nomex and Vicoose FR



Sabuk Pemandam

Fireman's Belt
Nilon tahan panas
Kepala sabuk tahan karat



Kacamata

Safety Goggles
Tahan goresan/ Anti kabut
Pengikat kepala kain elastis



BREATHING APPARATUS

SCBA SANFire

Breathing apparatus
Cylinder material carbon fiber composite
Working pressure: 300 bar
Max. gas volume 6,8L
Safety value: 0.8~1.2 Mpa
EN 137 standard



SCBA Compressor

Breathing apparatus compressor
Max. working pressure 350 bar
1st stage pressure 3,5 bar
2nd stage pressure 27 - 30 bar
1 cylinder 10 ltr @225 bar - 16 min ±5%
1 cylinder 10 ltr @300 bar - 21,4 min ±5%
CE Certified

RESCUE TOOLS



Cutter

Battery/ Hydraulic



Combi Tool

Battery/ Hydraulic



Spreader

Battery/ Hydraulic



RAM

Battery/ Hydraulic



Hydraulic Pump

For rescue tools



Tripod Vertical Rescue

Max load 500 kg
Adjustable locking legs
Aluminum tripod & corrosion resistant
CE:EN 795



Body Harness

EVA material waist liner
4 polyester belt tool ring
EN358/ EN361/ EN813



DISASTER MANAGEMENT



Gergaji Stihl

Chainsaw Stihl



Obor Sulut

Drip Torch



Peralatan Manual

Fiber/ wood Handle Manual Tools



Tenda Posko

Kain 450D double coated
Rangka blacksteel
Size customizable



Onion Portable Water Tank

Self Support Kapasitas 5000L
Inflatable time < 1 minute
PVC coating fabric



Velbed

Material filament
Pita webbing flat nylon 100% 25mm
System lipat



Manual Backpack Pump

Material PVC rib stop
Dilengkapi unit spray
Kapasitas 20L



Flood Control Board

Red ABS 5 mm
Surface anti UV coating
Alloy Polyester composite material



Perahu Karet

Polyethylene rubber
3 layer PVC mesh (inner)
6 / 8 / 10 pax



Light Tower

Single person operated
Height up to 5.3 meters
Weatherproof
Wind resistance level 8
Adjustable beam angle
Water resistance IP65
Run time up to 20 hours
Battery powered: 0 - 35.000 Lumens
AC Powered: 0 - 65.000 Lumens
Run time up to 20 hours

FIRE TRUCK



FIRE RESCUE



LIGHT FIREFIGHTING

